



Applications


Bi-metal lugs are primarily used for connecting electrical copper terminals and aluminum or aluminum alloy conductors with rated voltage 35KV or below.

Standard

GB 14315, GB9327, IEC 61238, or other standards required by customers.

Features

1. Structure of oil plugging
2. CU and AL are friction-welded.
3. Conductive paste is available.
4. Plastic packing

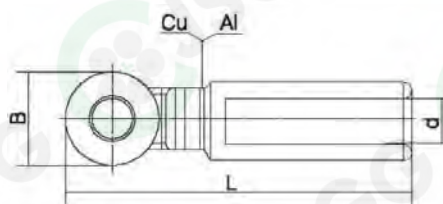

Specifications	C.S.A. of conductor (s.p. mm)	Size(mm)			Dia. of bolt (mm)
		L(mm)	d(mm)	B(mm)	
CAL-16BS-10	16	78	5.5	20	10
CAL-25BS-10	25	78	6.3	20	10
CAL-35BS-10	35	78	8.4	20	10
CAL-50BS-12	50	87	9.3	24	12
CAL-70BS-12	70	87	10.8	24	12
CAL-95BS-12	95	87	12.3	24	12
CAL-120BS-12	120	109	13.6	30	12
CAL-150BS-12	150	109	15.4	30	12
CAL-185BS-16	185	116	16.9	35	16
CAL-240BS-16	240	116	19.4	35	16
CAL-300BS-16	300	154.5	23.1	36	16
CAL-400BS-16	400	154.5	25.9	36	16
CAL-500BS-20	500	192	28.9	60	20
CAL-630BS-20	630	192	32.4	60	20